


SKR Series

Universal Strip Retrofit Kit w/Reflector

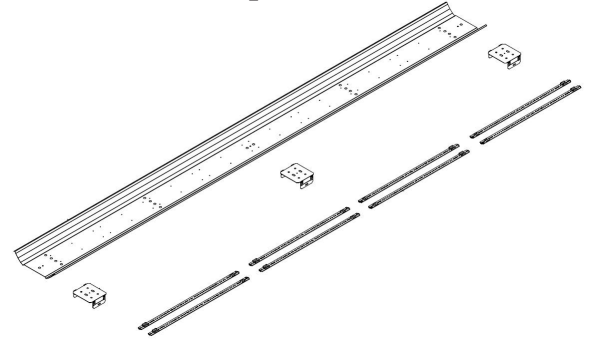

TYPICAL OPTIONS AND ACCESSORIES

Whips, wire guards and tube guards. See options page at the end of the T02STRIP section, or contact factory for more details.



INTENDED USE:

Designed to convert 4' or 8' T12 or T8 industrial and strip fixtures to more efficient LED technology. Choose between retrofitting with a reflector for enhanced performance or simply a ballast cover. Both kits utilize a Universal Socket Bracket engineered to fit most fluorescent channels from 4" to 5.25" in width. The Reflector/Ballast Cover and the LED module are for easy maintenance after retrofit is complete. The LED module is easy to install in channels and required only simple hand tools.

HOUSING

Die formed cold rolled steel body with heavy duty construction. Mates with Parabolic louver.

MOUNTING

The SKR universal strip retrofit kit mounts easily, requiring only simple hand tools. The process includes removal of the existing ballast cover(s) and removal of the existing socket brackets and ballast. The new reflector is then attached to the existing strip channel. The reflector serves as the ballast cover. Mount and connect new ballast to LED module. Close the reflector using captive quarter turns.

REFLECTORS

Precision formed, high performance, premium mirrored specular reflector or enhanced white reflector.

ORDERING INFORMATION

Example: SKR48LF57W6400LW10DMV40K

STANDARD

SK	R	48L	F57W6400L	W10	DMV	40K
Series		Size			Driver	Color Temperature
SK		48L 48"			DMV 0-10V Dimming *Field installed-Dimming Wire	30K 3000K 35K 3500K
	Type		Wattage and Lumen		DMVFID 0-10V Dimming *Factory installed-Dimming Wire	40K 4000K 50K 5000K
	R Reflector B Ballast Cover		F28W3200L 28 System Watts, 3200 Delivered Lumens F57W6400L 57 System Watts, 6400 Delivered Lumens	Reflector/Ballast Cover		
				W10 High Reflectivity White B4 4.25" Ballast Cover B5 5" Ballast Cover		


HIGH OUTPUT

SK	R	48L	H72W8200L	W10	DMV	40K
Series		Size			Driver	Color Temperature
SK		48L 48"			DMV 0-10V Dimming *Field installed-Dimming Wire	30K 3000K 35K 3500K
	Type		Wattage and Lumen		DMVFID 0-10V Dimming *Factory installed-Dimming Wire	40K 4000K 50K 5000K
	R Reflector B Ballast Cover		S32W4450L 32 System Watts, 4450 Delivered Lumens H72W8200L 72 System Watts, 8200 Delivered Lumens	Reflector/Ballast Cover		
				W10 High Reflectivity White B4 4.25" Ballast Cover B5 5" Ballast Cover		

* Consult FACTORY for more options

SKR Series

Universal Strip Retrofit Kit w/Reflector

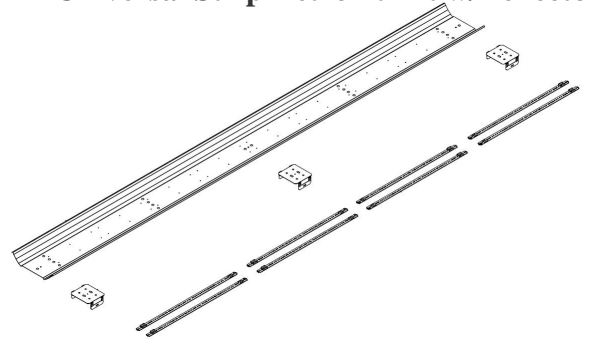

ORDERING INFORMATION

STANDARD

Example: **SKR96LF57W6400LW10DMV40K**

SK	R	96L	S60W6800L	W10	DMV	40K
Series		Size			Driver	Color Temperature
SK		96L 96"			DMV 0-10V Dimming *Field installed-Dimming Wire	30K 3000K 35K 3500K 40K 4000K 50K 5000K
	Type		Wattage and Lumen		DMVFID 0-10V Dimming *Factory installed-Dimming Wire	
	R Reflector B Ballast Cover		S60W6800L 60System Watts, 6800 Delivered Lumens F114W12800L 114 System Watts, 12800 Delivered Lumens	Reflector/Ballast Cover		
				W10 High Reflectivity White B4 4.25" Ballast Cover B5 5" Ballast Cover		



* Consult FACTORY for more options

SKR Series

Universal Strip Retrofit Kit w/Reflector


DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

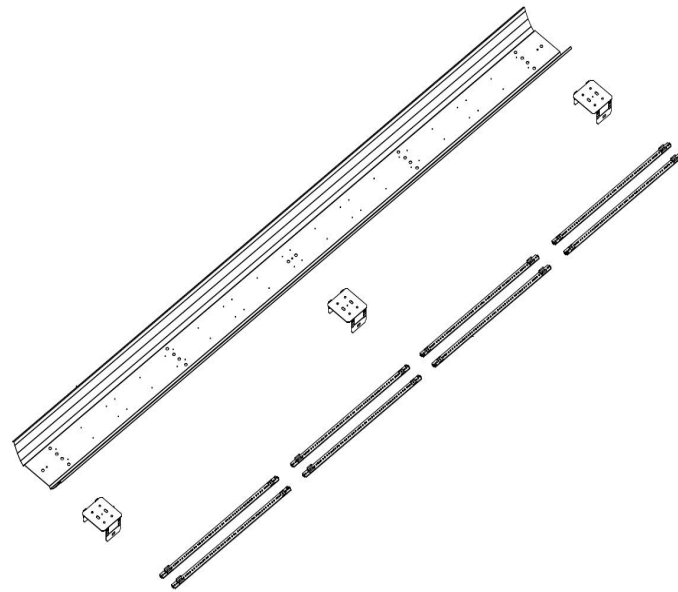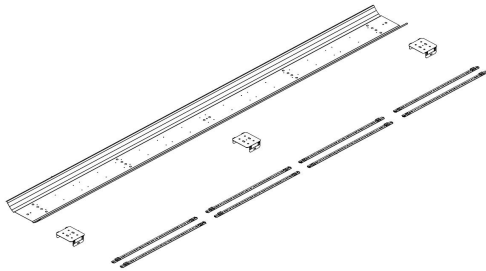

8ft Retrofit Kit

existing housing

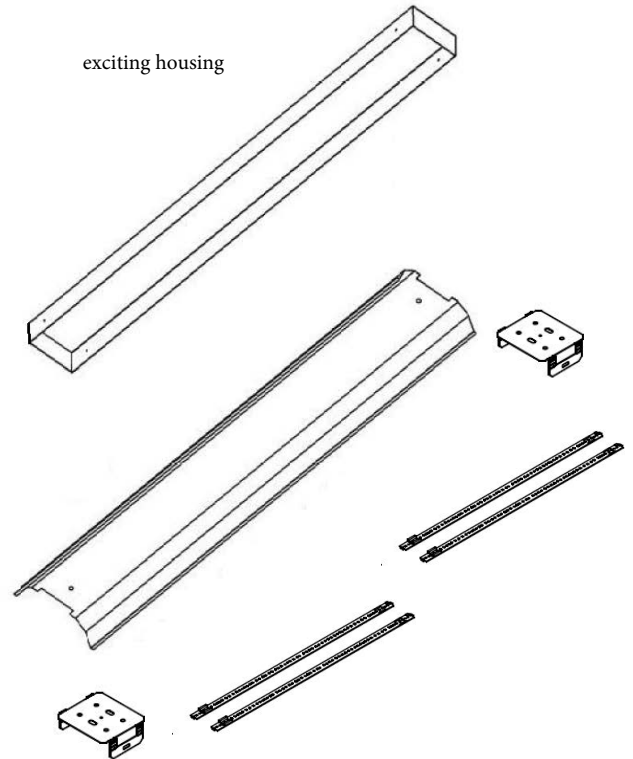

4ft Retrofit Kit

